

8 OTAPs Passive Network Optical Taps MPO/MTP Plug-in Module


FIBERWDM provide reliable continuous visibility 100% of network traffic to support performance and security with no network performance degradation or disruption. And FIBERWDM **8 OTAPs Passive Network Optical Taps MPO/MTP** can supports 4 40G/100G/200G MPO/MPT lines traffic copy.

Product Panel




8OTAPs Passive Network Optical Taps MPO/MTP

Application

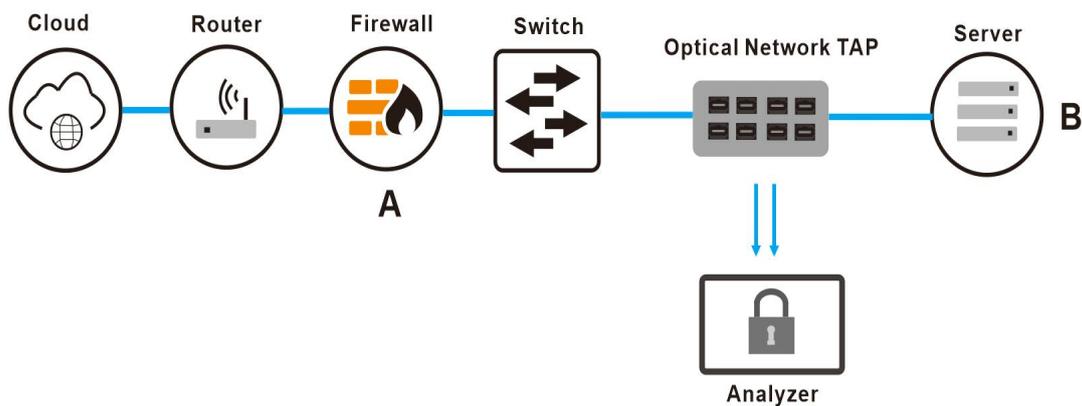

The Network optical taps are deployed at any inline connection on the network, therefore no additional overhead or management burden is added to the network devices to copy traffic for the monitoring/security infrastructure. The FIBERWDM Tap is compatible with all major manufacturers' monitoring devices, including protocol analyzers, probes, and intrusion detection systems, and is protocol agnostic.

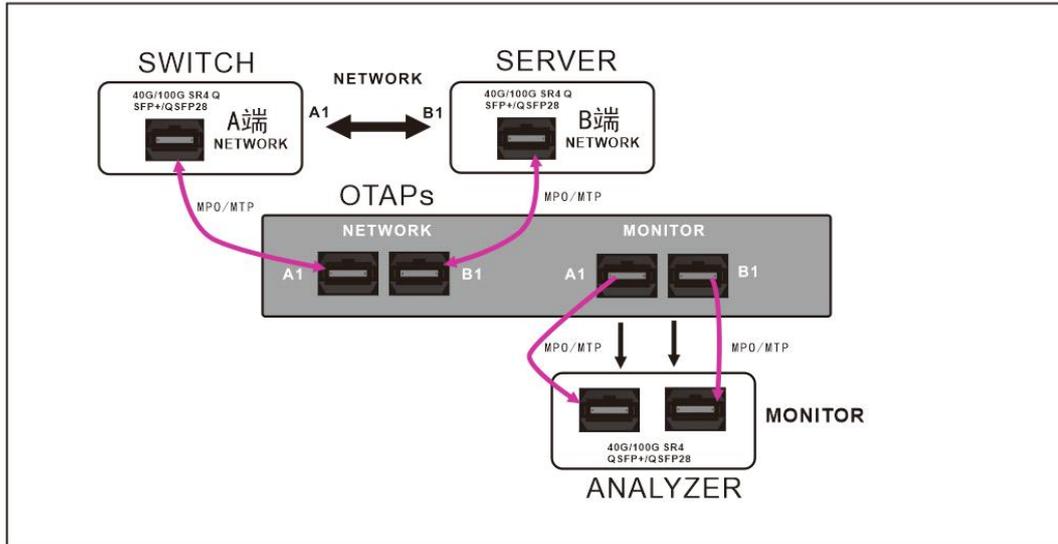


Schematic of MPO Network Optical Taps

Product Specification

| | |
|--------------------------------|---------------------------------------|
| Part No. | RD-8TAPS-LGX01-MPO-M4 |
| Split ratio | 50/50 |
| Taps | 8 OTAPs, 4 lines network traffic copy |
| Operating Wavelength (nm) | 850nm |
| Network Insertion Loss(dB) | ≤4.8 |
| Monitor Insertion Loss (dB) | ≤4.8 |
| Loss Uniformity (dB) | ≤0.8 |
| Return Loss (dB) | ≥55 |
| PDL (dB) | ≤0.15 |
| Directivity (dB) | ≥55 |
| FIBER Type | OM4 or customer specified |
| Connector | MPO/MTP |
| Dimension(mm) | Plug-in Module Box: 220*200*39MM |
| | 2Slot 1U Rack 440*230*44MM |
| Operating Temperature (°C) | -40 ~ +85 |

Notes: Room temperature test .

Package Information

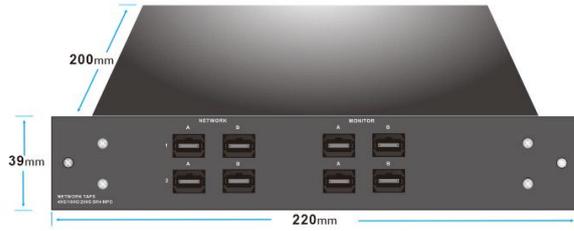

Otaps Plug-in Module

1U 2slot for Plug-in Module 19" Rack

Order information

| Part No. | Specification |
|-----------------------|----------------------------------------------------------------------------------------|
| RD-8TAPS-LGX01-MPO-M4 | 8 OTAPs (4 lines network traffic copy), MM 50:50 OM3 850nm MPO/MTP Plug-in Module box |
| 1U02-2LGX | 19" inch 1U rack with 2 slot for Plug-in Module box, 440*230*44mm |